



Fiber Optic Transport Products

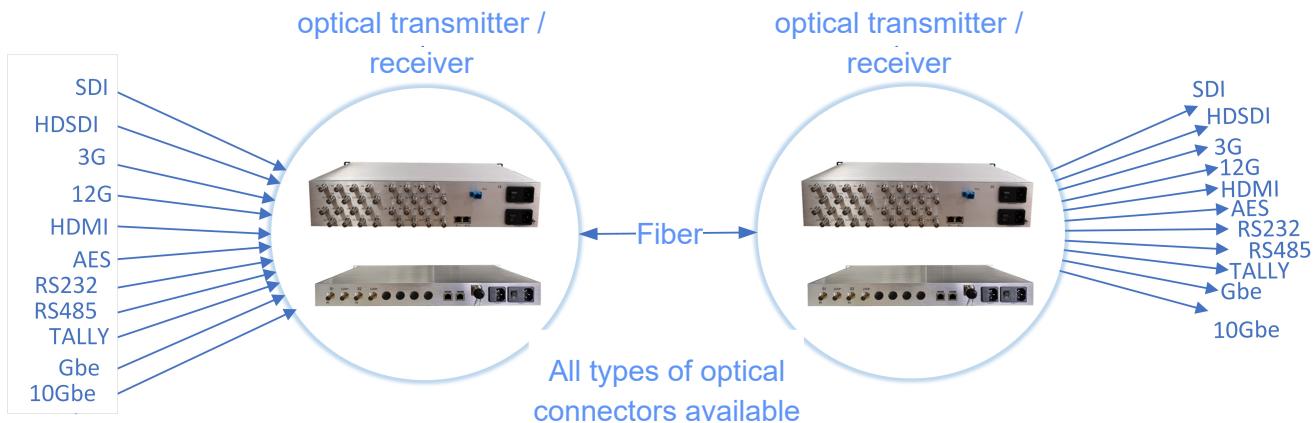

- All possible bidirectional configurations with ASI-DVB/SDI/HD-SDI/3G-SDI/12G-SDI/HDMI/AES/Analog Audio/RS232/RS485/Tally/GbE/10GbE inputs in CWDM, DWDM up to 100 km.
- All types of optical connectors, UPC, LC, SC/APC, LEMO (with remote power supply).
- Dual power supply, WEB interface, Alarms, Buzzers.
- For event-based use and permanent links (stadium, NDCs, local broadcast channels, etc.)

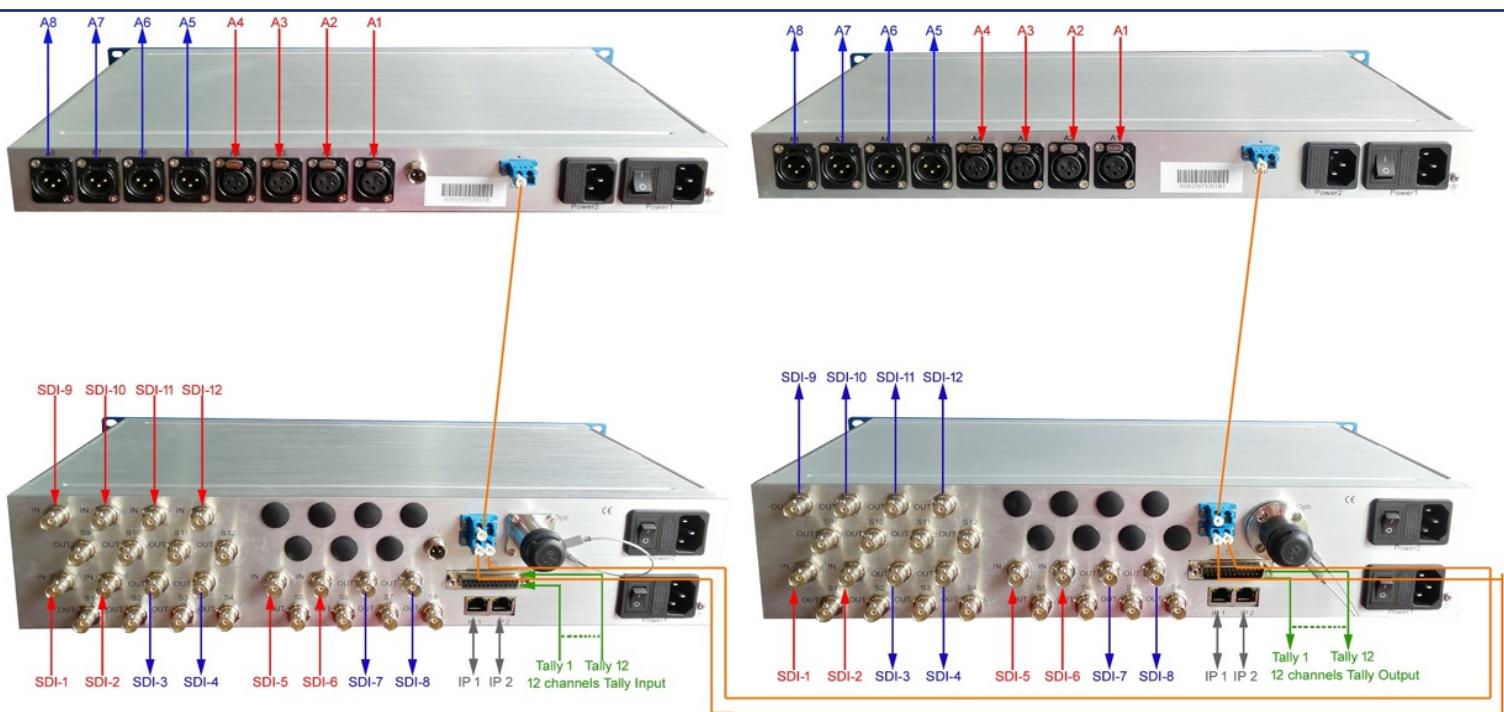

Equipment Configuration Used in Teahupo'o (Olympic Games) 2024

4 AES bidirectional channels

2 GbE (Gigabit Ethernet) connections

Single-mode fiber, 40 km range

4 video signals in one direction, 8 video signals in the other direction

12 Tally signals

Connectors: LC and LEMO